

goslyn™ MODEL GOS320 100 GPM Grease Removal Device



Model: GOS320

Capacity: 100 Gallons / Minute

GOS320 - Standard Features:

- ☐ Heavy duty 2.5 mm, 304 Stainless Steel exterior construction
- Neoprene seals on base of unit
- (2) Immersion heaters (UL listed) to keep effluent warm during idle periods
- Strainer basket to prevent solid debris from entering the drain pipes
- Easy access hinged lid compartments
- □ Two oil collection cassettes included
- No moving parts
- Manufactured to ASME A112.14.3 and ASME A112.14.4 standards
- ☐ Five Year Limited Warranty

Short Form Specification

Shall be a Goslyn Model: GOS320 grease removal device / immiscible liquid separator which continuously operates under hydro static pressure with no moving parts. Is made of 2.5 mm, 304 stainless steel and comes standard with two (2) immersion heaters and two (2) oil recovery cassettes. It has a capacity of 100 gallons per minute.

"The easiest & most effective GRD to operate & maintain!"



Goslyn LP 1904 University Business Dr Suite 310 McKinney TX 75071


Phone: 888-648-5040 Fax: 214-618-3765 www.goslyn.com




goslyn™ MODEL GOS320 100 GPM Grease Removal Device





Model:	GOS320
Shipping Dimensions	51" X 28" X 33" 129.5 cm X 71.1 cm X 83.8 cm
Shipping Weight	205 lbs. / 93.0 Kg
Required Clearances	 Headroom needed above strainer basket: 12" 3" NPT inlet 4" NPT outlet Access to front Oil Cassette Access to hinged lid for Oil Valve
Electrical Requirements:	(2) 110 Volt, 1000 watts, 9 Amps within 5' of unit

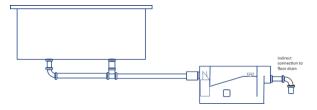

The Goslyn Outlet may **discharge either indirectly** (e.g., into a floor sink, as shown in the above schematic) **or directly** to a drainpipe.





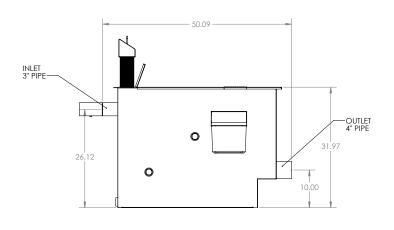

"The easiest & most effective GRD to operate & maintain!"



Goslyn LP 1904 University Business Dr. Suite #310

McKinney, Texas, U.S.A. 75071

Phone: 888-648-5040 Fax: 214-618-3765 www.goslyn.com